



ITEM NO.	QTY. -041	PART NUMBER	DESCRIPTION
1	X	D4410-041	CO-PILOT COLLECTIVE HEAD ASSEMBLY (205)
2	1	D4410-1	CO-PILOT COLLECTIVE HEAD
3	1	D4410-7	CONDUIT
4	1	D4410-11	205 SHIM
5	1	D4410-15	REAR COVER
6	4	90296A108	HELI-COIL INSERT (6-32 X 0.276)
7	1	MS171539	PIN

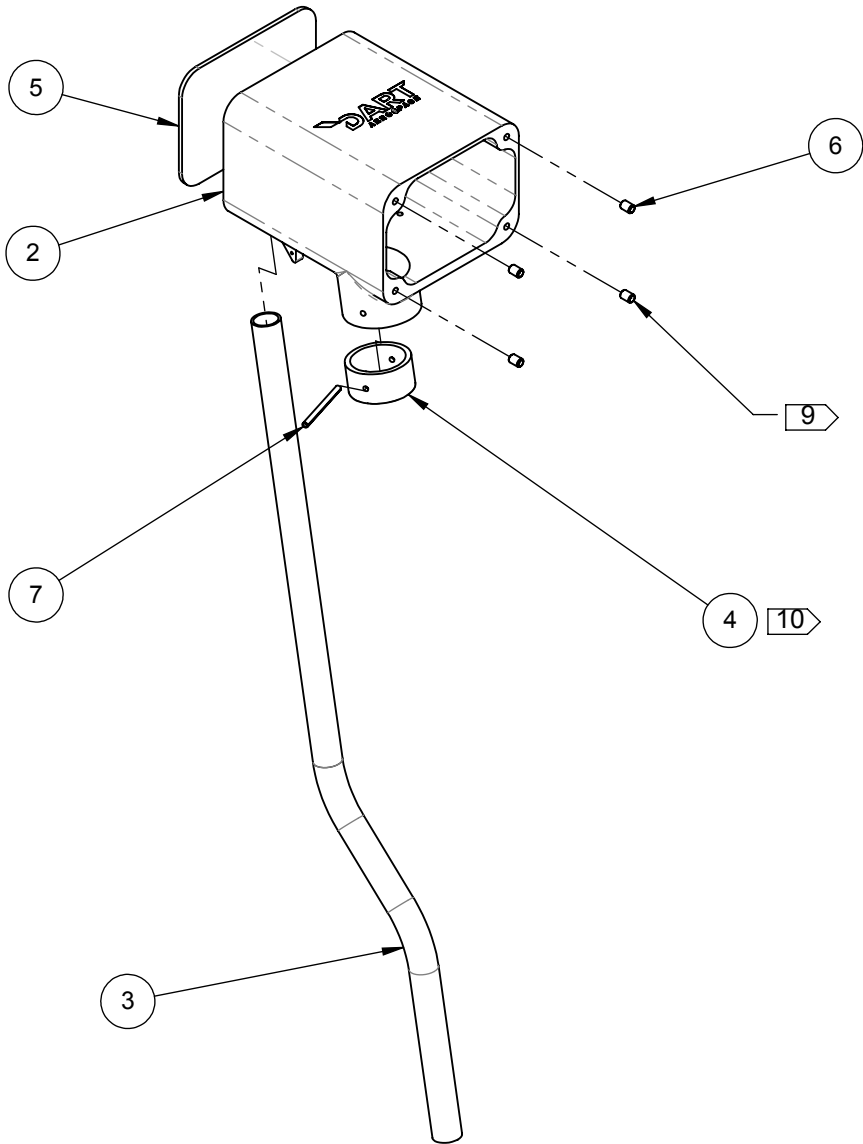

D4410-041 CO-PILOT COLLECTIVE HEAD ASSEMBLY (205)



- NOTES:
- 1) MATERIAL: N/A
 - 2) FINISH: ANODIZE BLACK PER MIL-A-8625F TYPE I OR IB OR IC OR II OR IIB CLASS 2 AFTER WELDING
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
 - 7) WEIGHT: 1.55 lbs
 - 8) WELD PER DART QSI 004
 - 9) INSTALL AFTER ANODIZING
 - 10) INSTALL AFTER ANODIZING WET WITH PROSEAL 890 OR EQUIVALENT ENSURE THAT PROSEAL DOES NOT CONTACT PIN

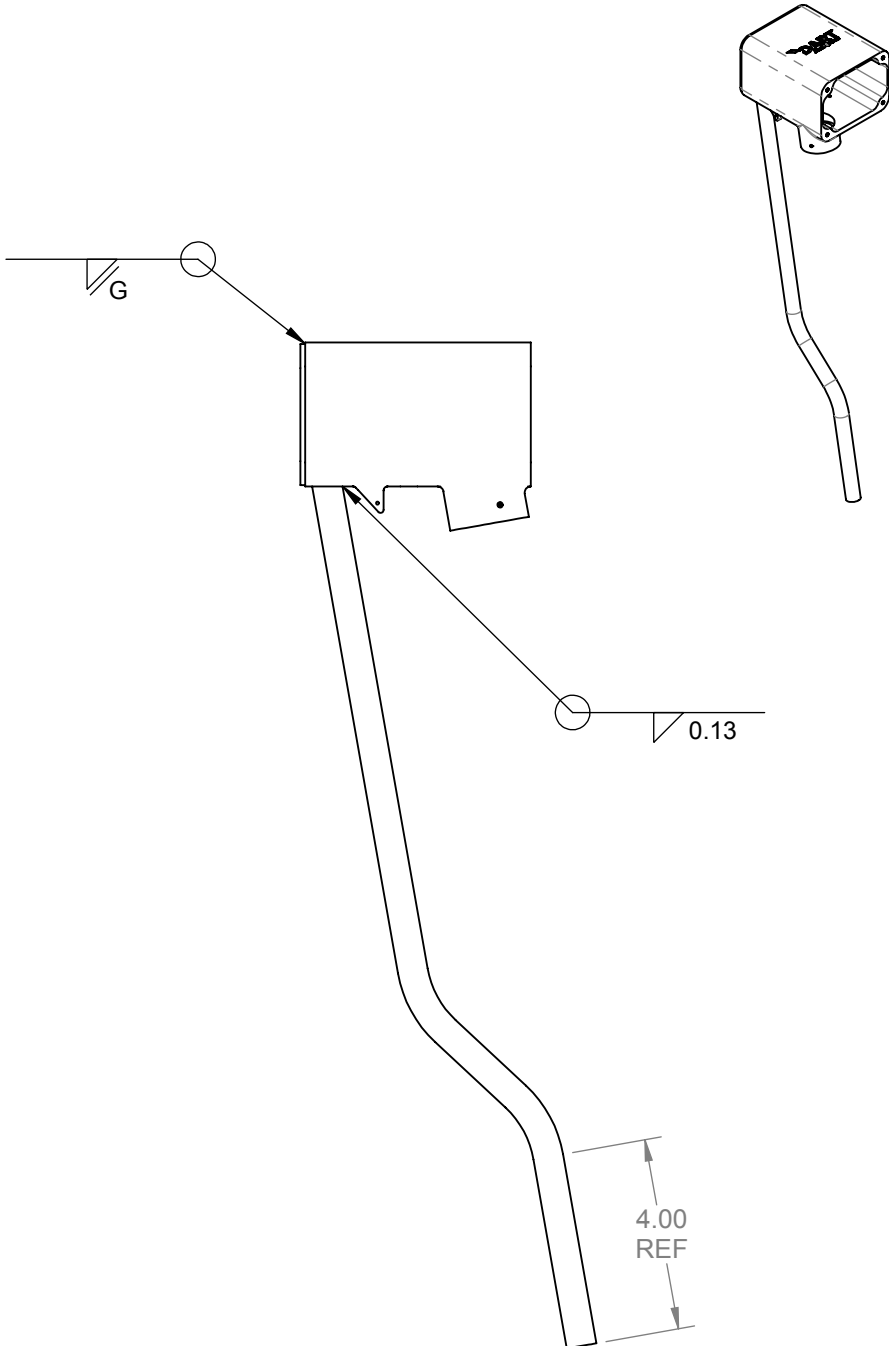

D4410-041 WELDING DETAIL
(-041 SHOWN, -043/-045 SIMILAR)

C	ADD HOLE DIM, ZN C6-7.	VS	12.10.11
B	ADD C'BORE, ZN A4-2. ENLARGE HOLES, ZN C5-3 & B8-3. UPDATE LOGO. ADD -045/-11/-13/-15. ROTATE HOLE, ZN C3-2. INCREASE -7 DIAMETER, ZN C1-6. REMOVE -9 FROM -041 ASSEMBLY, ZN C5-1.	DC	12.07.30
A	NEW ISSUE	DC	11.06.06
REV.	DESCRIPTION	BY	DATE
DESIGN	VS	DART AEROSPACE USA, INC. KENT, WA	
DRAWN	VS		
CHECKED	DC	DRAWING NO.	REV. C2
MFG. APPR.	JLM	D4410	SHEET 1 OF 12
APPROVED		TITLE	SCALE
DE APPR.		CO-PILOT COLLECTIVE HEAD	NTS
DATE	14.02.20	COPYRIGHT © 2011 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

ITEM NO.	QTY. -045	PART NUMBER	DESCRIPTION
1	X	D4410-045	CO-PILOT COLLECTIVE HEAD ASSEMBLY (EAGLE SINGLE)
2	1	D4410-1	CO-PILOT COLLECTIVE HEAD
3	1	D4410-7	CONDUIT
4	1	D4410-13	212 SHIM
5	1	D4410-15	REAR COVER
6	4	90296A108	HELI-COIL INSERT (6-32 X 0.276)
7	1	MS171599	PIN

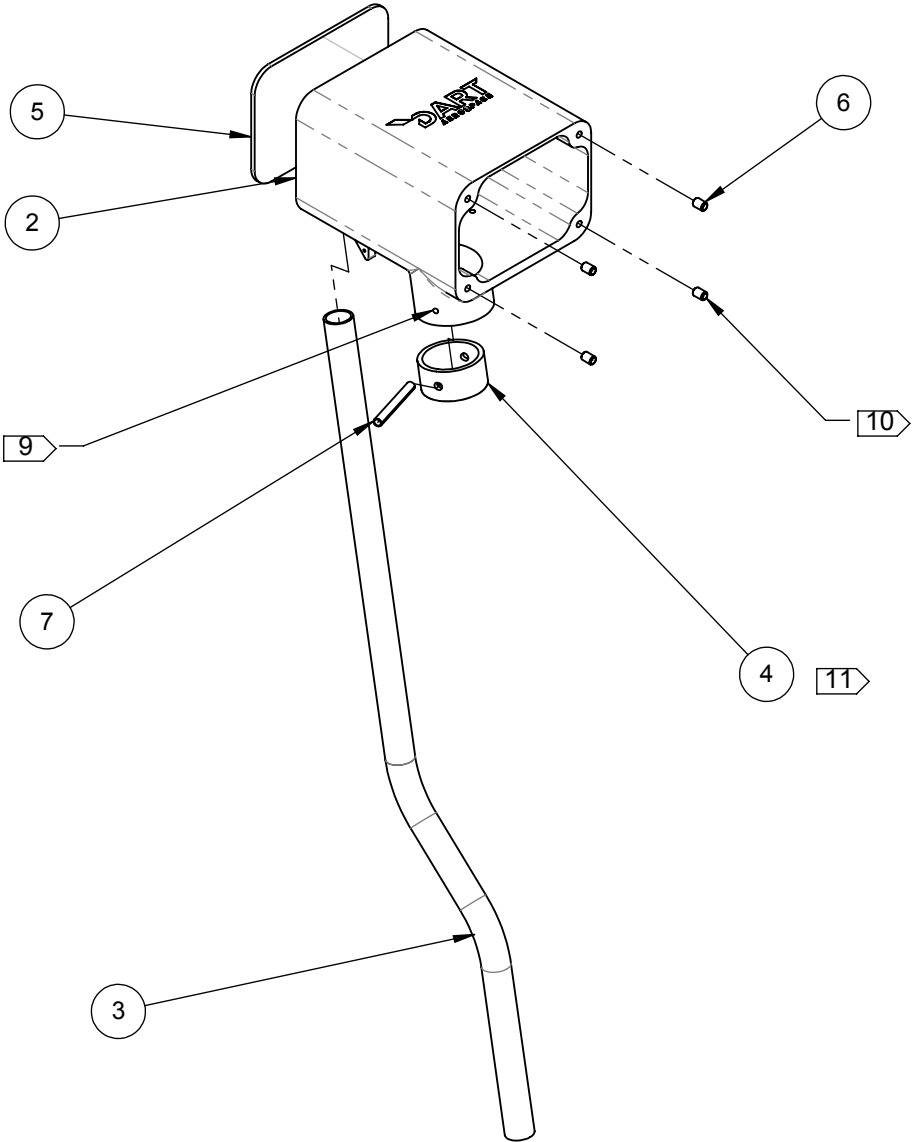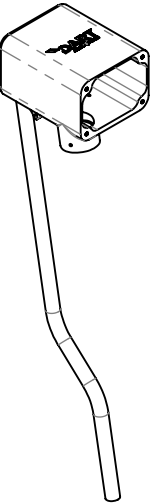



- NOTES:
- 1) MATERIAL: N/A
 - 2) FINISH: ANODIZE BLACK PER MIL-A-8625F TYPE I OR IB OR IC OR II OR IIB CLASS 2 AFTER WELDING
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
 - 7) WEIGHT: 1.55 lbs
 - 8) WELD PER DART QSI 004
 - 9) REAM TO Ø0.177 (DRILL #16)
 - 10) INSTALL AFTER ANODIZING
 - 11) INSTALL AFTER ANODIZING WET WITH PROSEAL 890 OR EQUIVALENT ENSURE THAT PROSEAL DOES NOT CONTACT PIN


**D4410-045 CO-PILOT COLLECTIVE HEAD ASSEMBLY
(EAGLE SINGLE)**

PRELIMINARY ISSUE

DESIGN	VS	DART AEROSPACE USA, INC. KENT, WA	
DRAWN	VS		
CHECKED	DC	DRAWING NO. D4410	REV. C2
MFG. APPR.	JLM		SHEET 3 OF 12
APPROVED		TITLE CO-PILOT COLLECTIVE HEAD	SCALE NTS
DE APPR.		COPYRIGHT © 2011 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	
DATE	14.02.20		

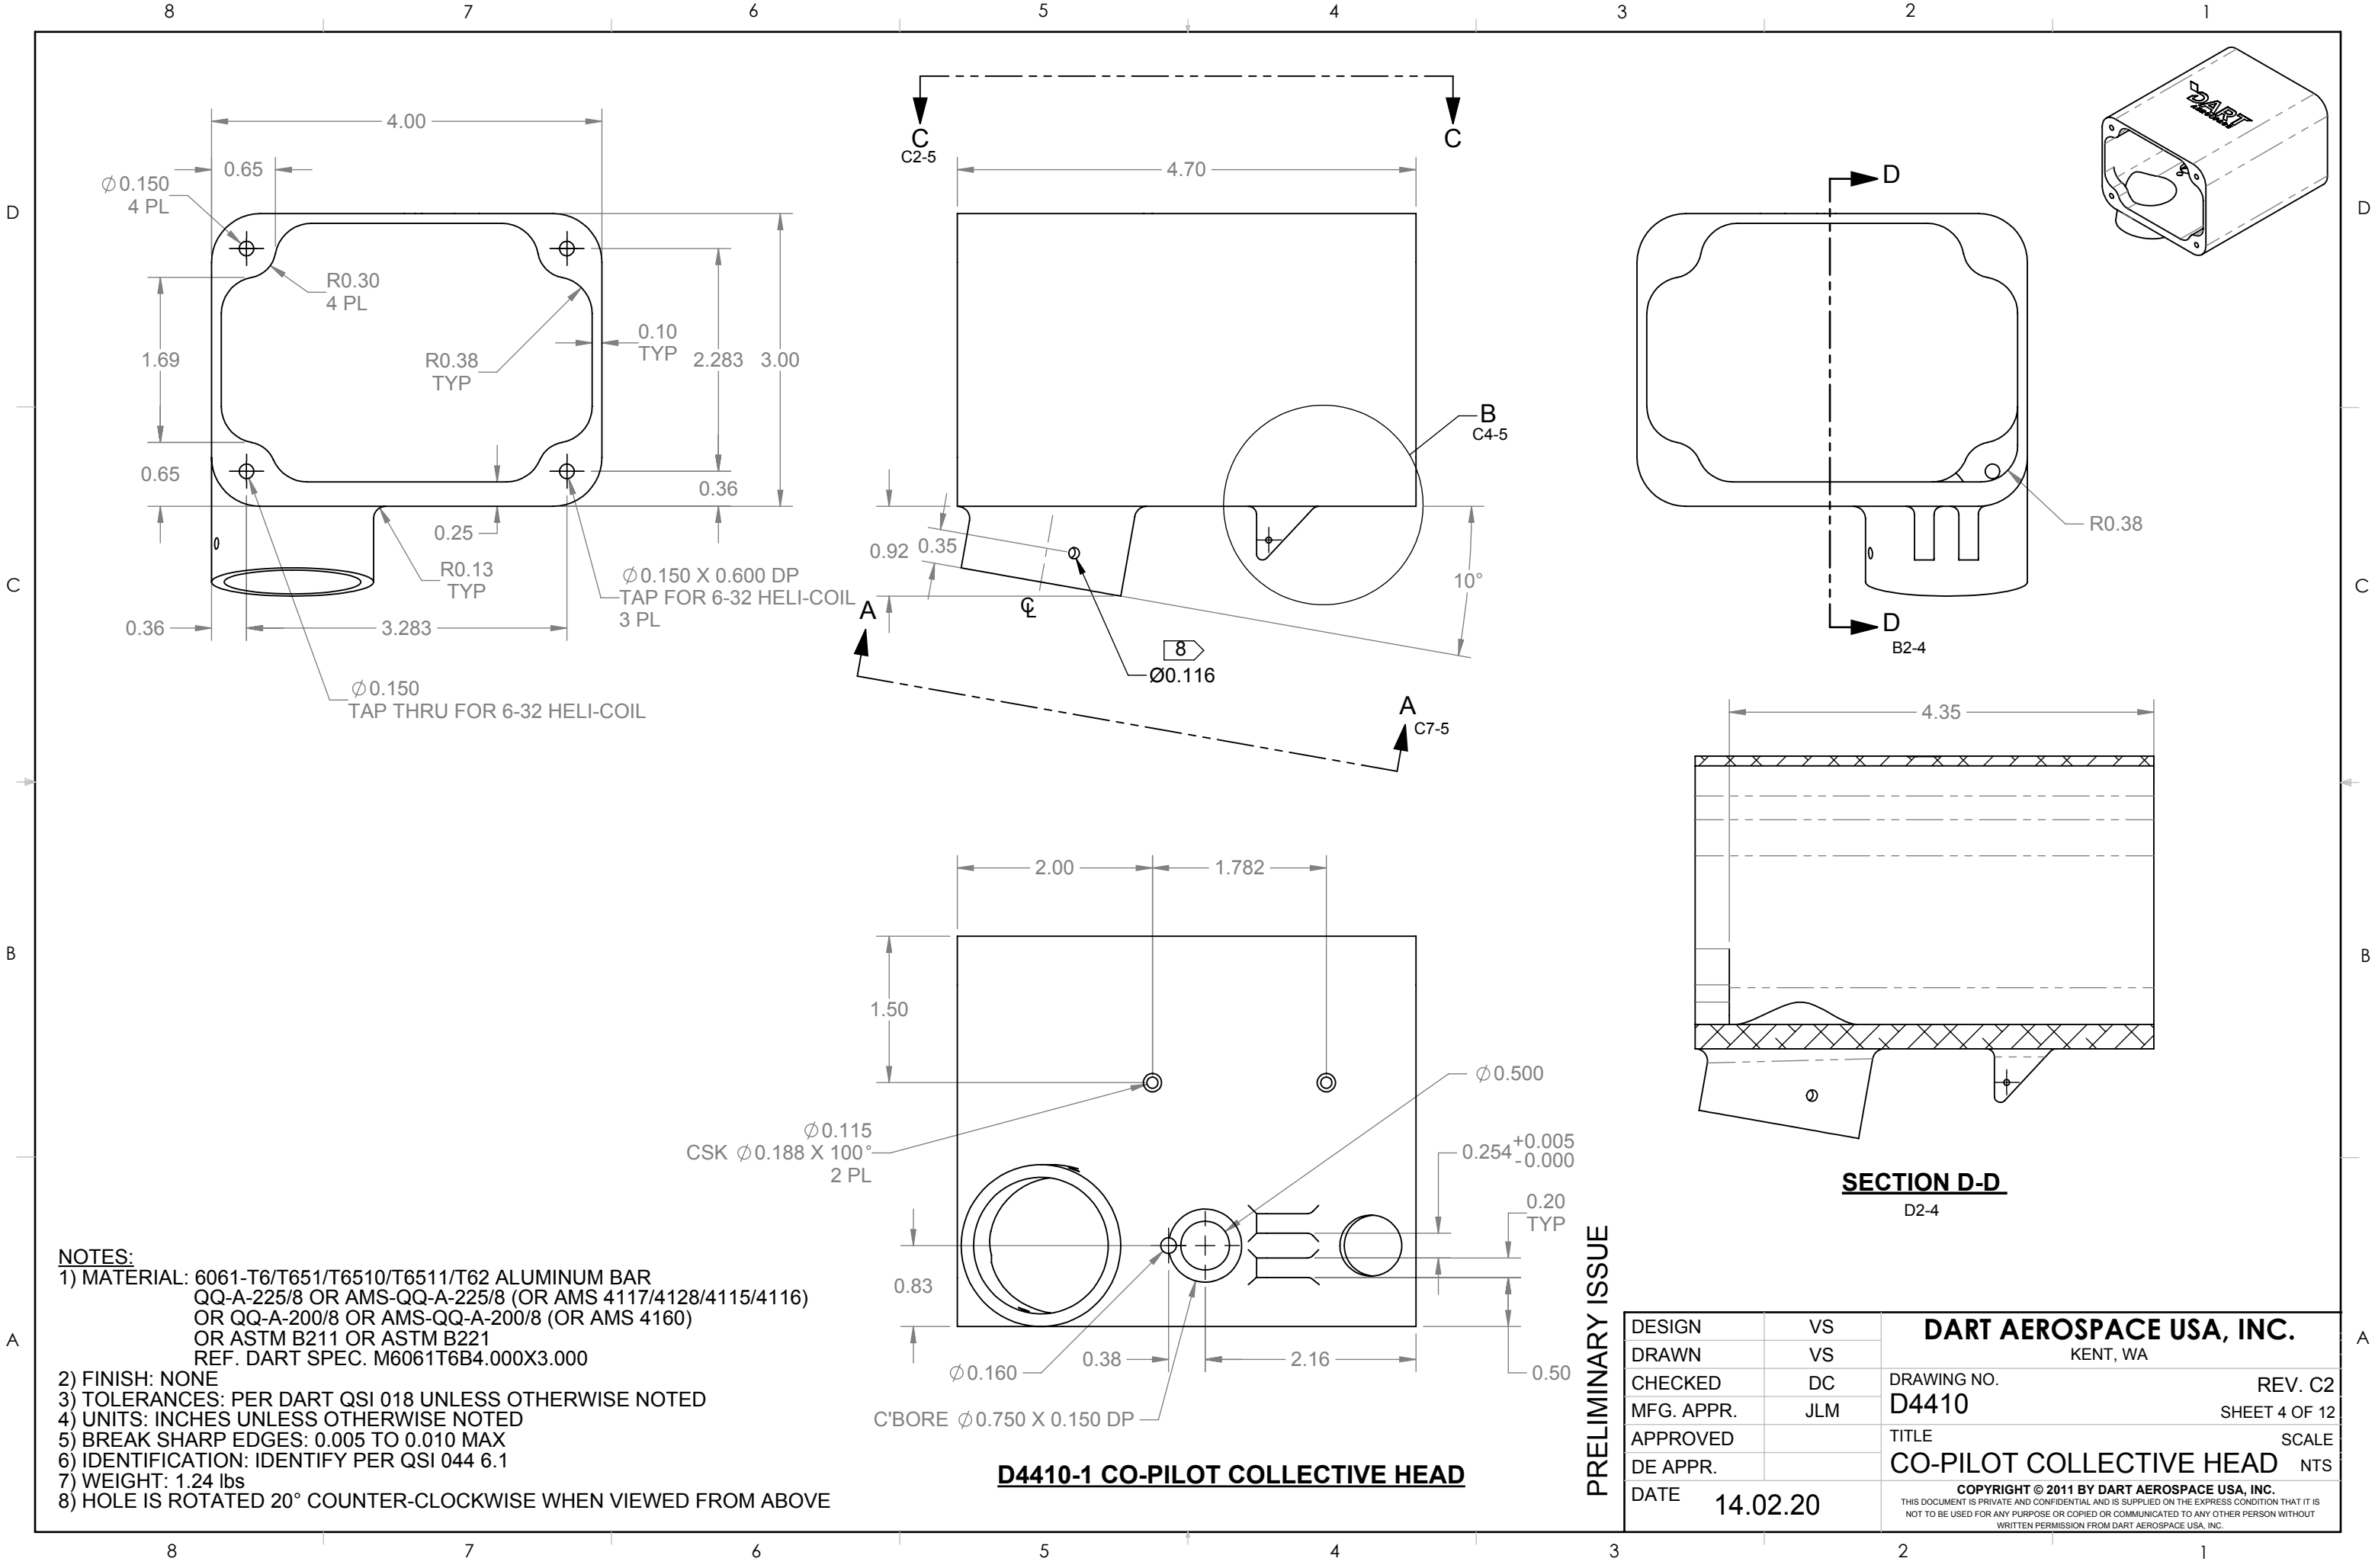

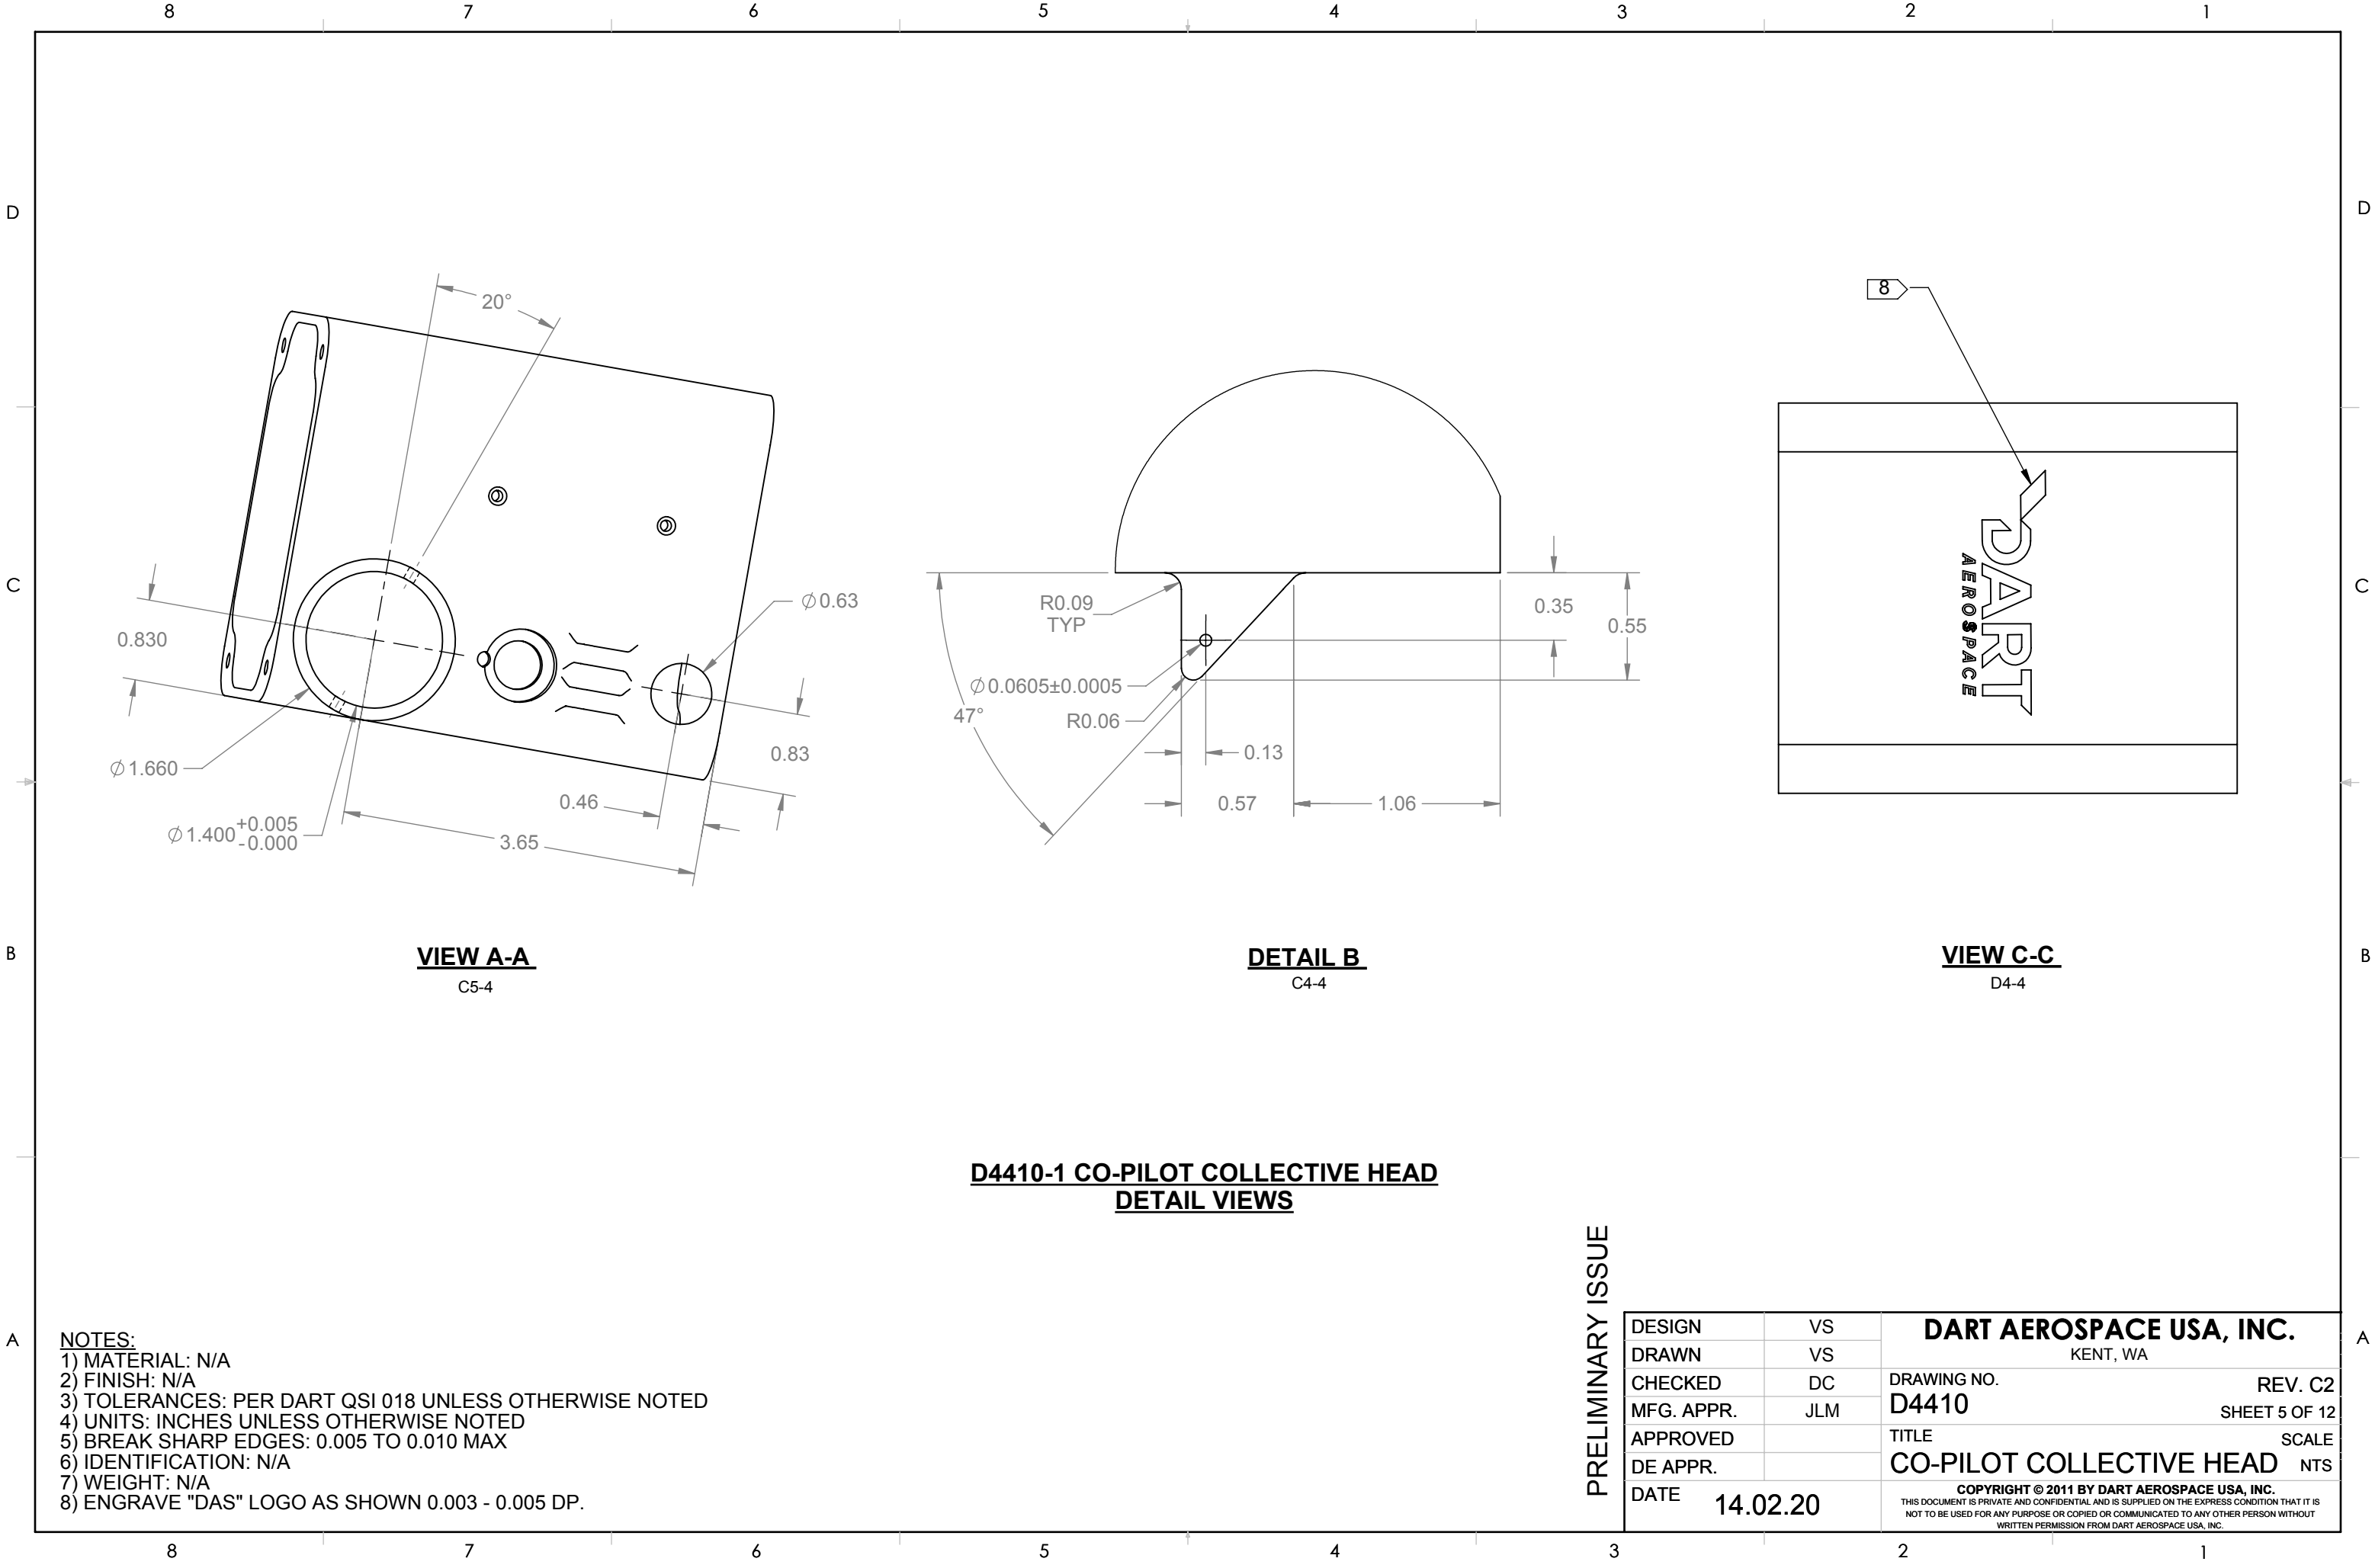

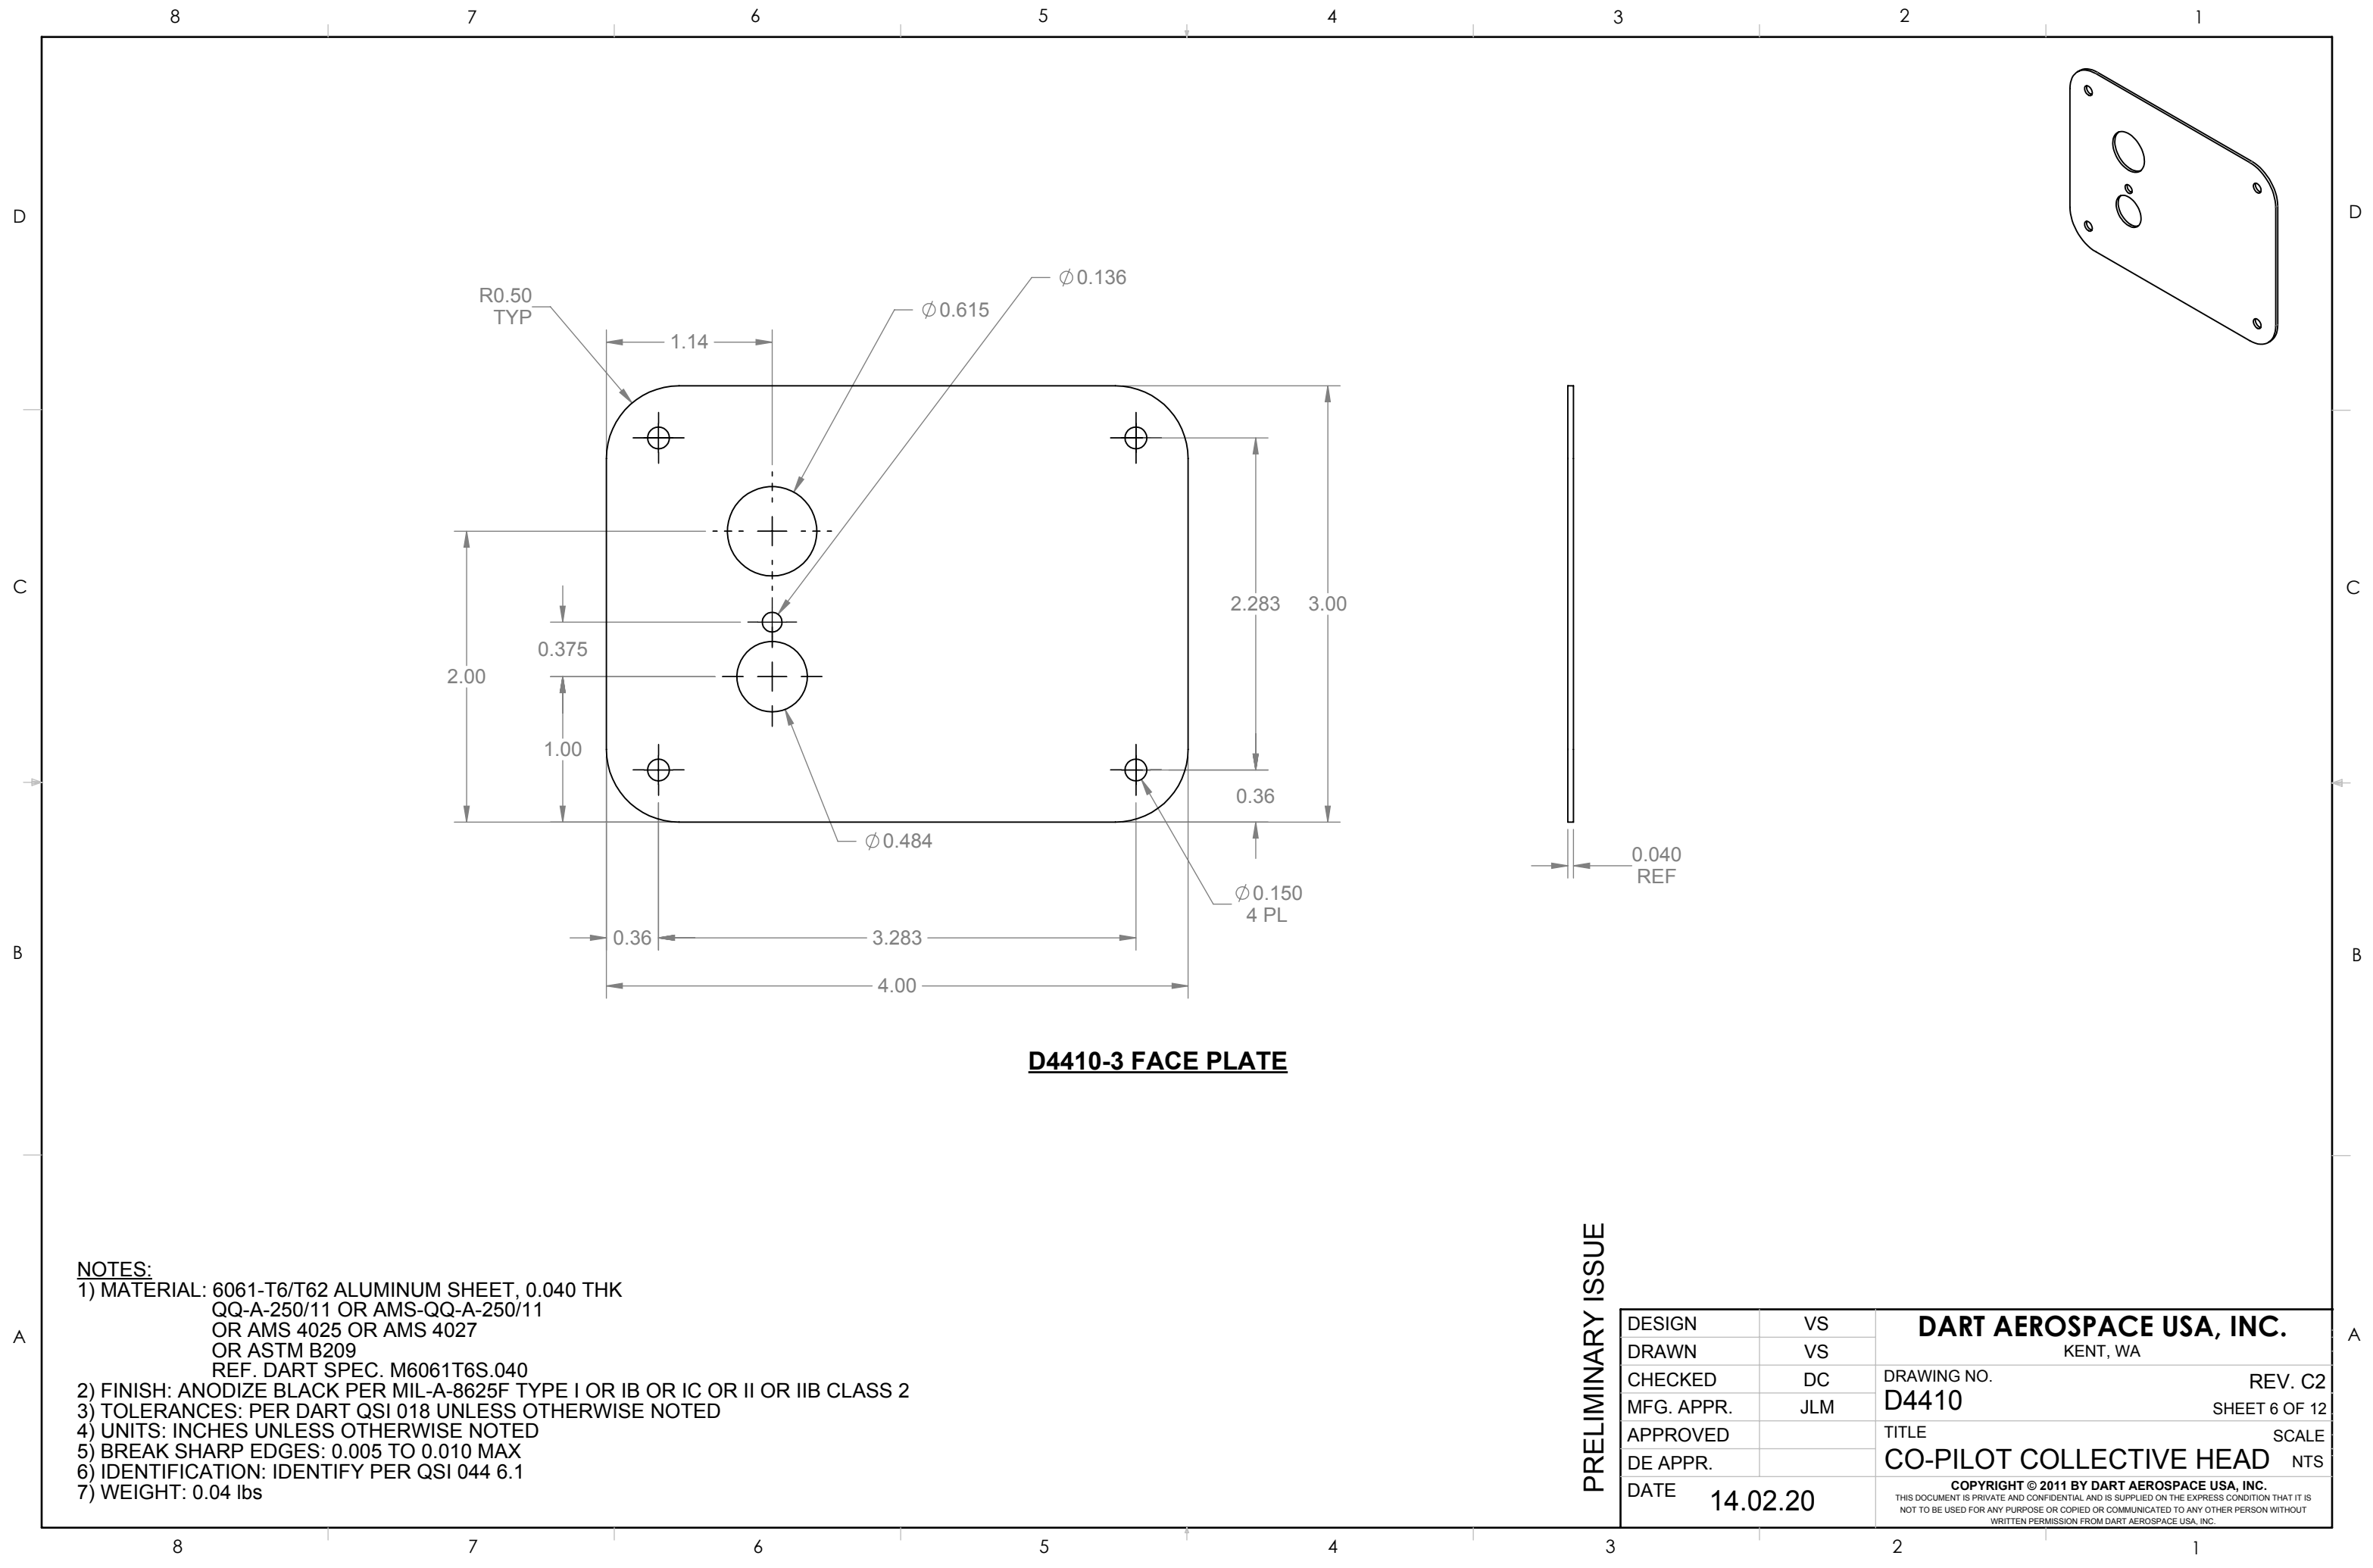



D4410-3 FACE PLATE

- NOTES:**
 1) MATERIAL: 6061-T6/T62 ALUMINUM SHEET, 0.040 THK
 QQ-A-250/11 OR AMS-QQ-A-250/11
 OR AMS 4025 OR AMS 4027
 OR ASTM B209
 REF. DART SPEC. M6061T6S.040
 2) FINISH: ANODIZE BLACK PER MIL-A-8625F TYPE I OR IB OR IC OR II OR IIB CLASS 2
 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
 7) WEIGHT: 0.04 lbs

PRELIMINARY ISSUE

DESIGN	VS	DART AEROSPACE USA, INC. KENT, WA	
DRAWN	VS		
CHECKED	DC	DRAWING NO. D4410	REV. C2
MFG. APPR.	JLM		SHEET 6 OF 12
APPROVED		TITLE	SCALE
DE APPR.		CO-PILOT COLLECTIVE HEAD	NTS
DATE	14.02.20	COPYRIGHT © 2011 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

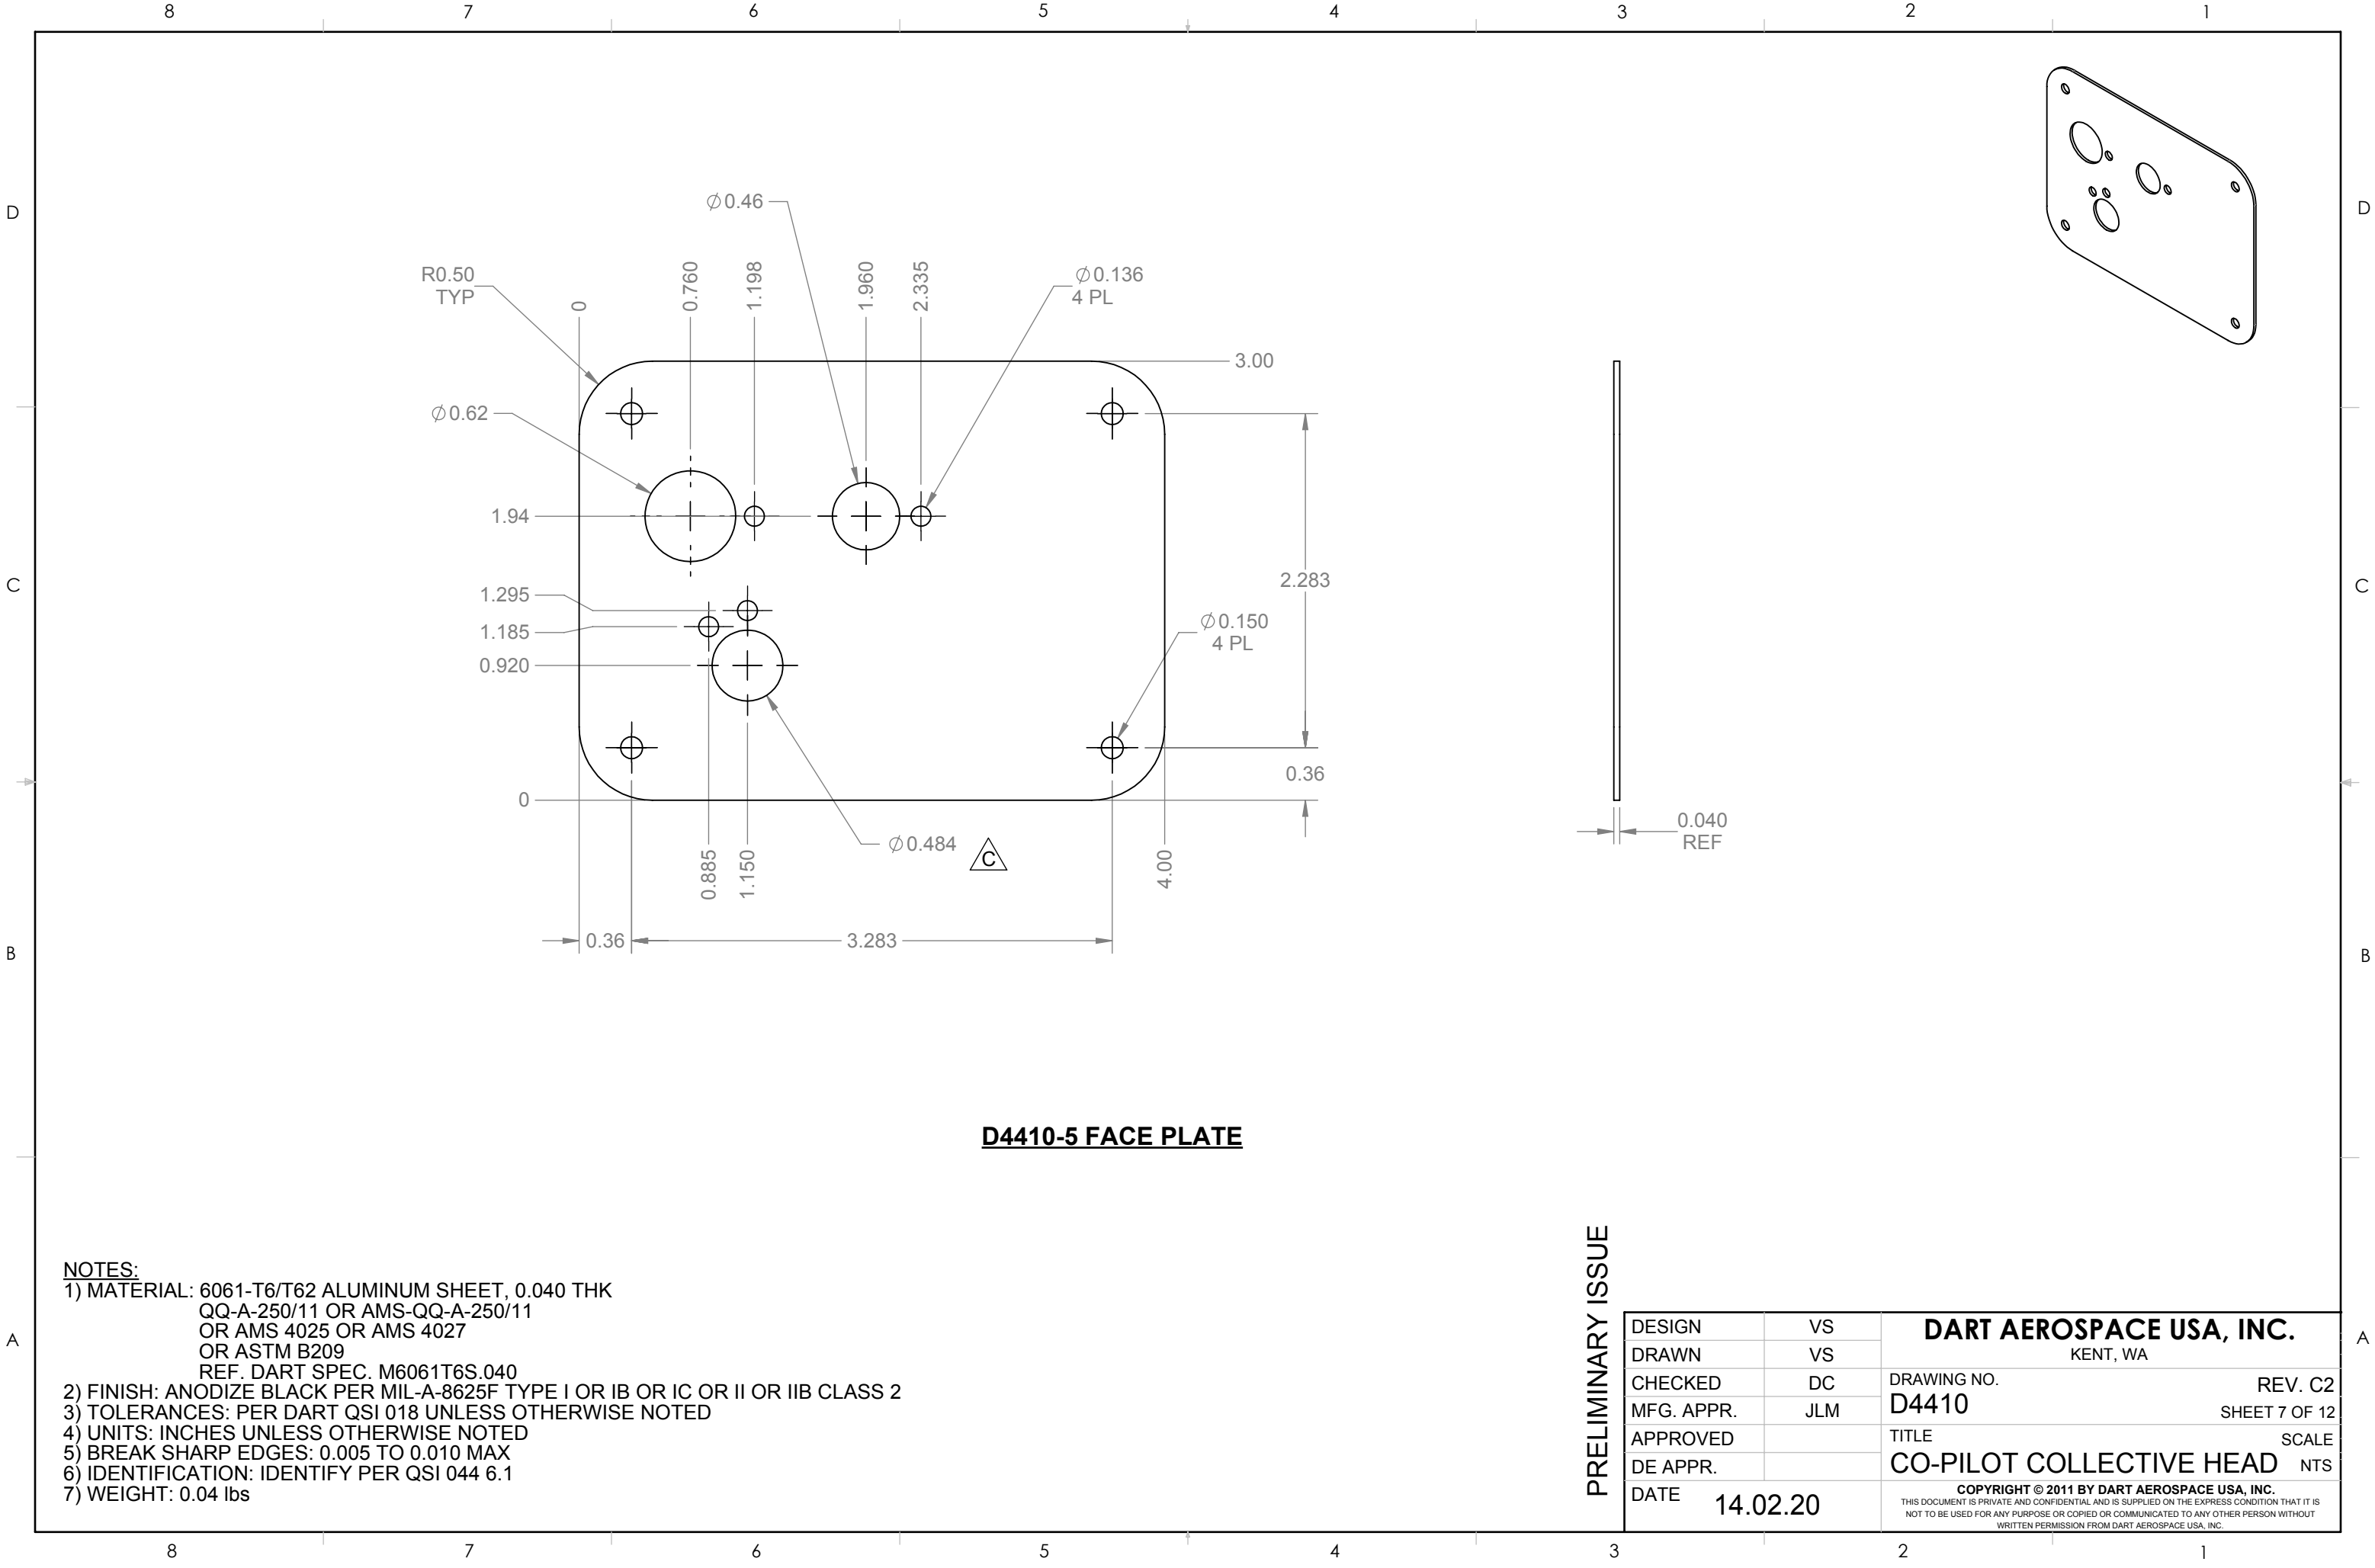


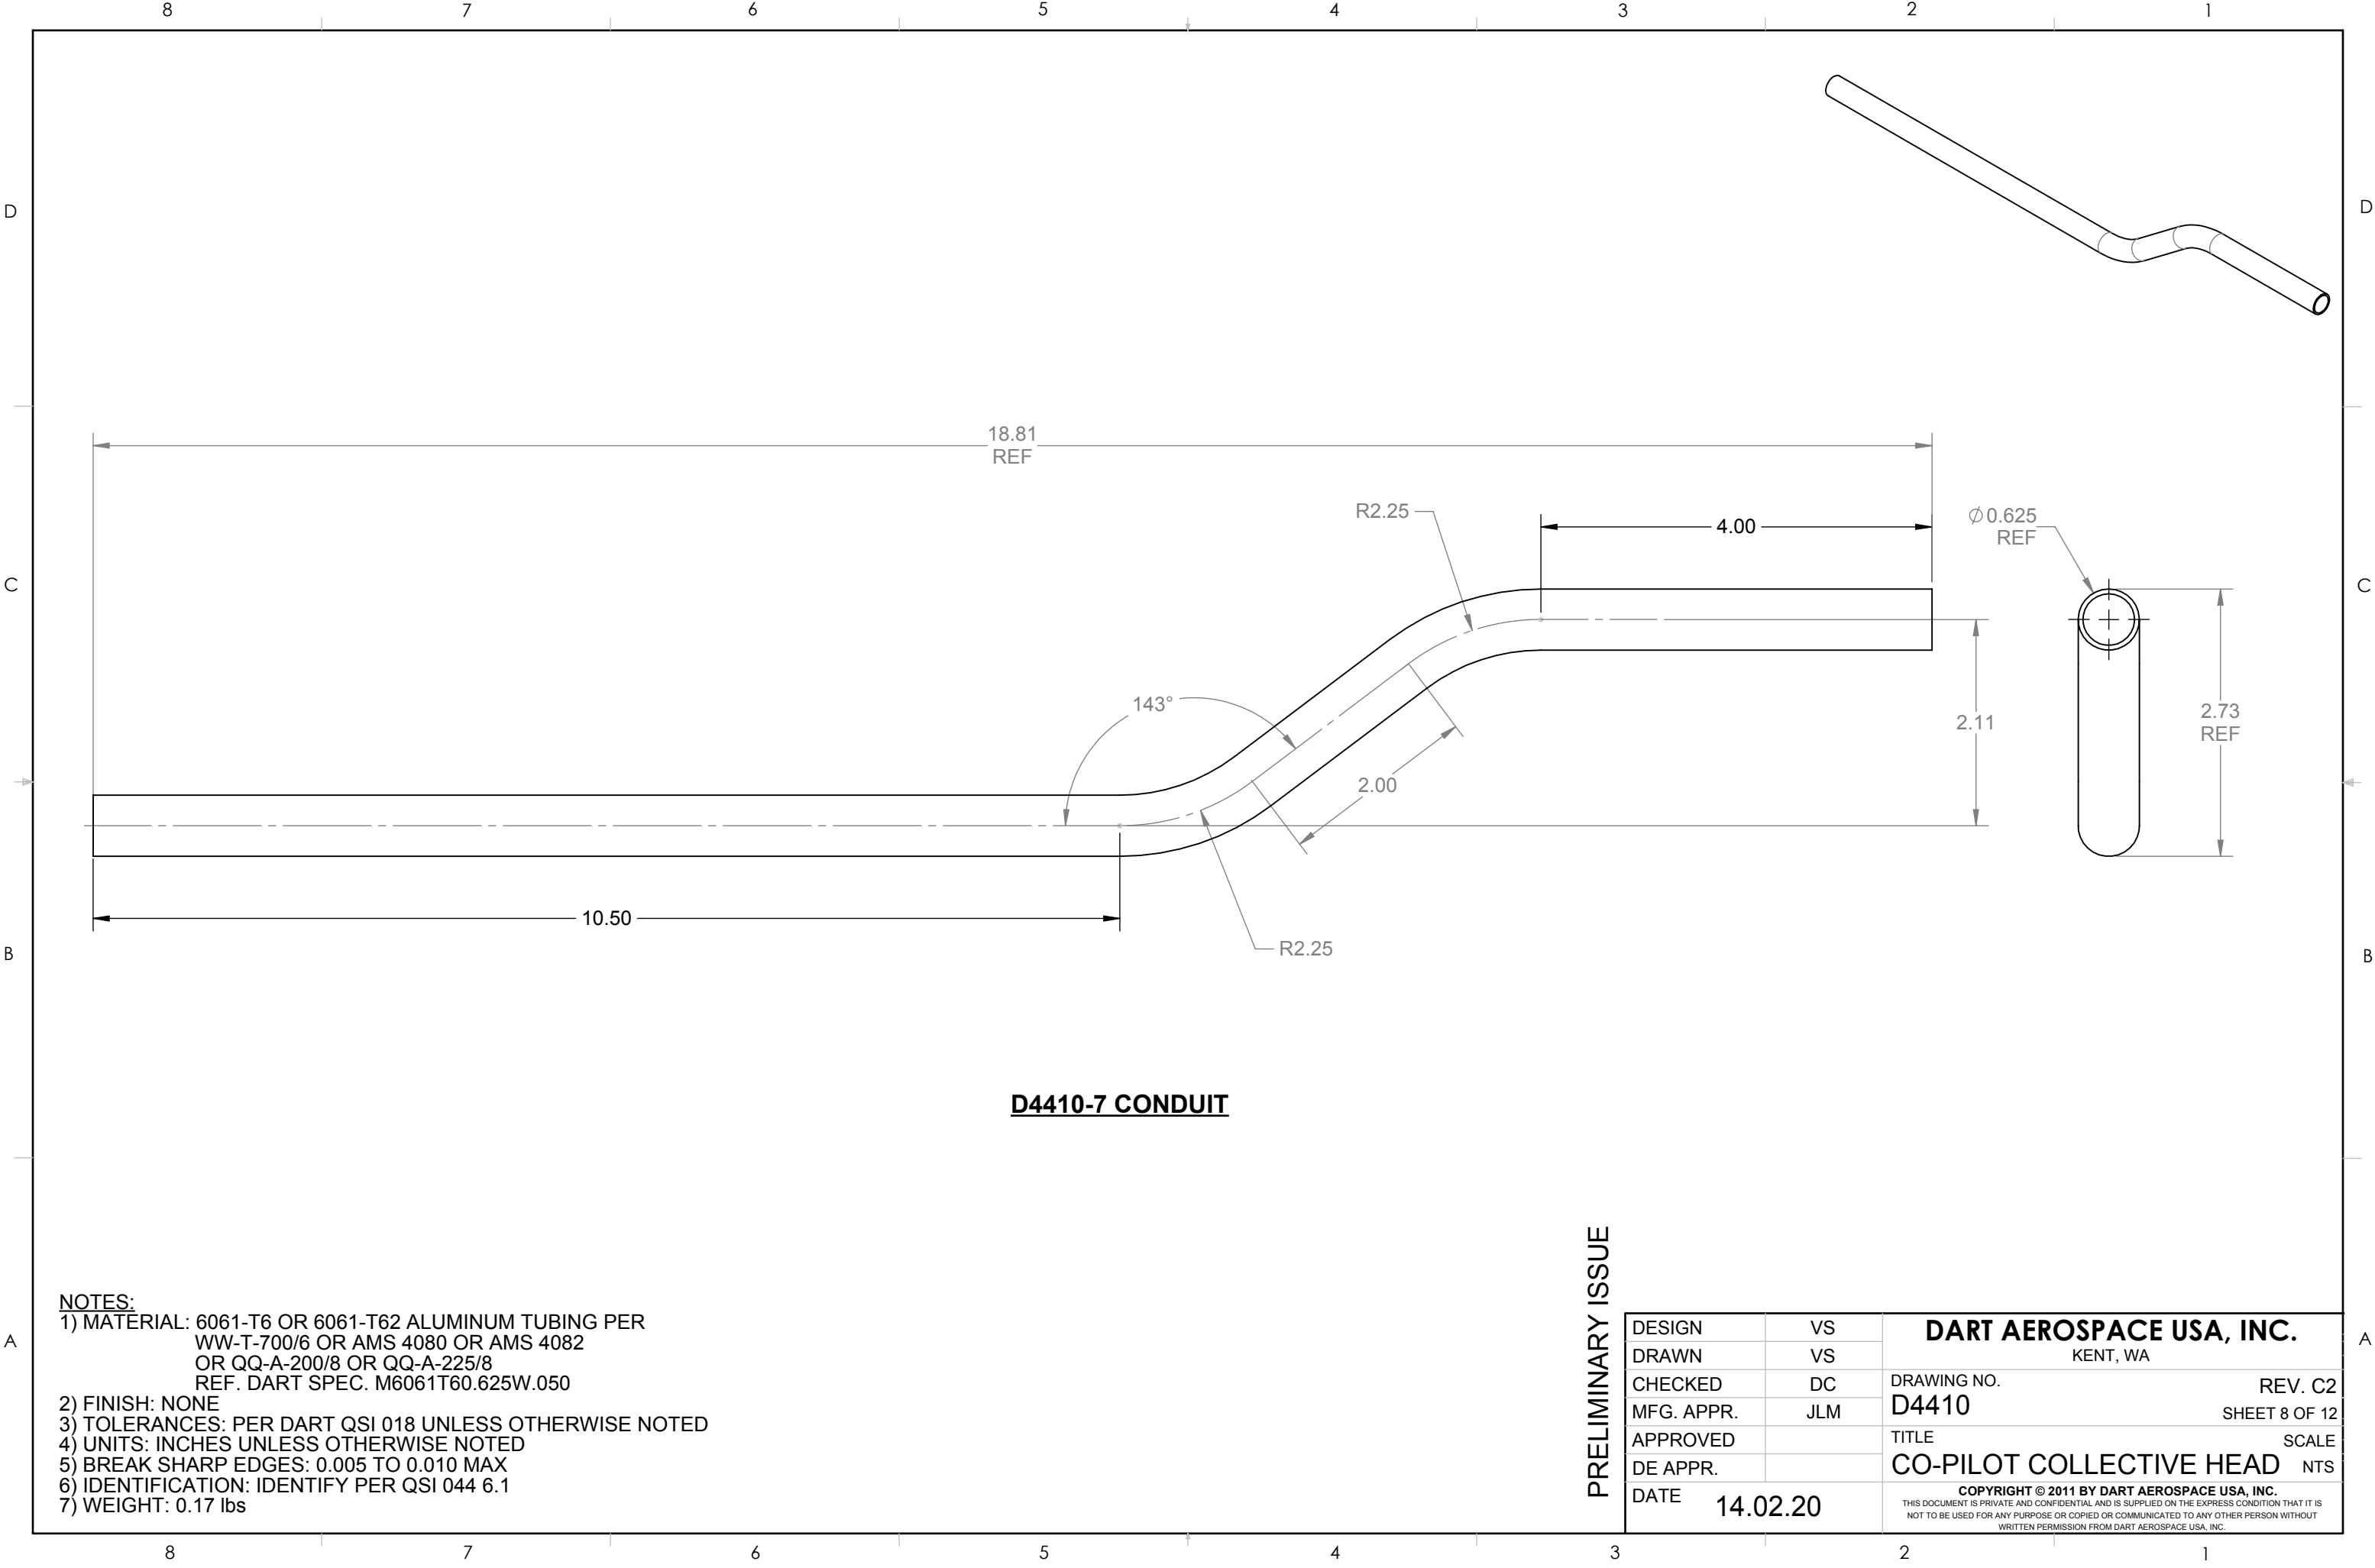

- NOTES:
- 1) MATERIAL: 6061-T6 OR 6061-T62 ALUMINUM TUBING PER WW-T-700/6 OR AMS 4080 OR AMS 4082 OR QQ-A-200/8 OR QQ-A-225/8 REF. DART SPEC. M6061T60.625W.050
 - 2) FINISH: NONE
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
 - 7) WEIGHT: 0.17 lbs

PRELIMINARY ISSUE

DESIGN	VS	DART AEROSPACE USA, INC. KENT, WA	
DRAWN	VS		
CHECKED	DC	DRAWING NO.	REV. C2
MFG. APPR.	JLM	D4410	SHEET 8 OF 12
APPROVED		TITLE	SCALE
DE APPR.		CO-PILOT COLLECTIVE HEAD	NTS
DATE	14.02.20	COPYRIGHT © 2011 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

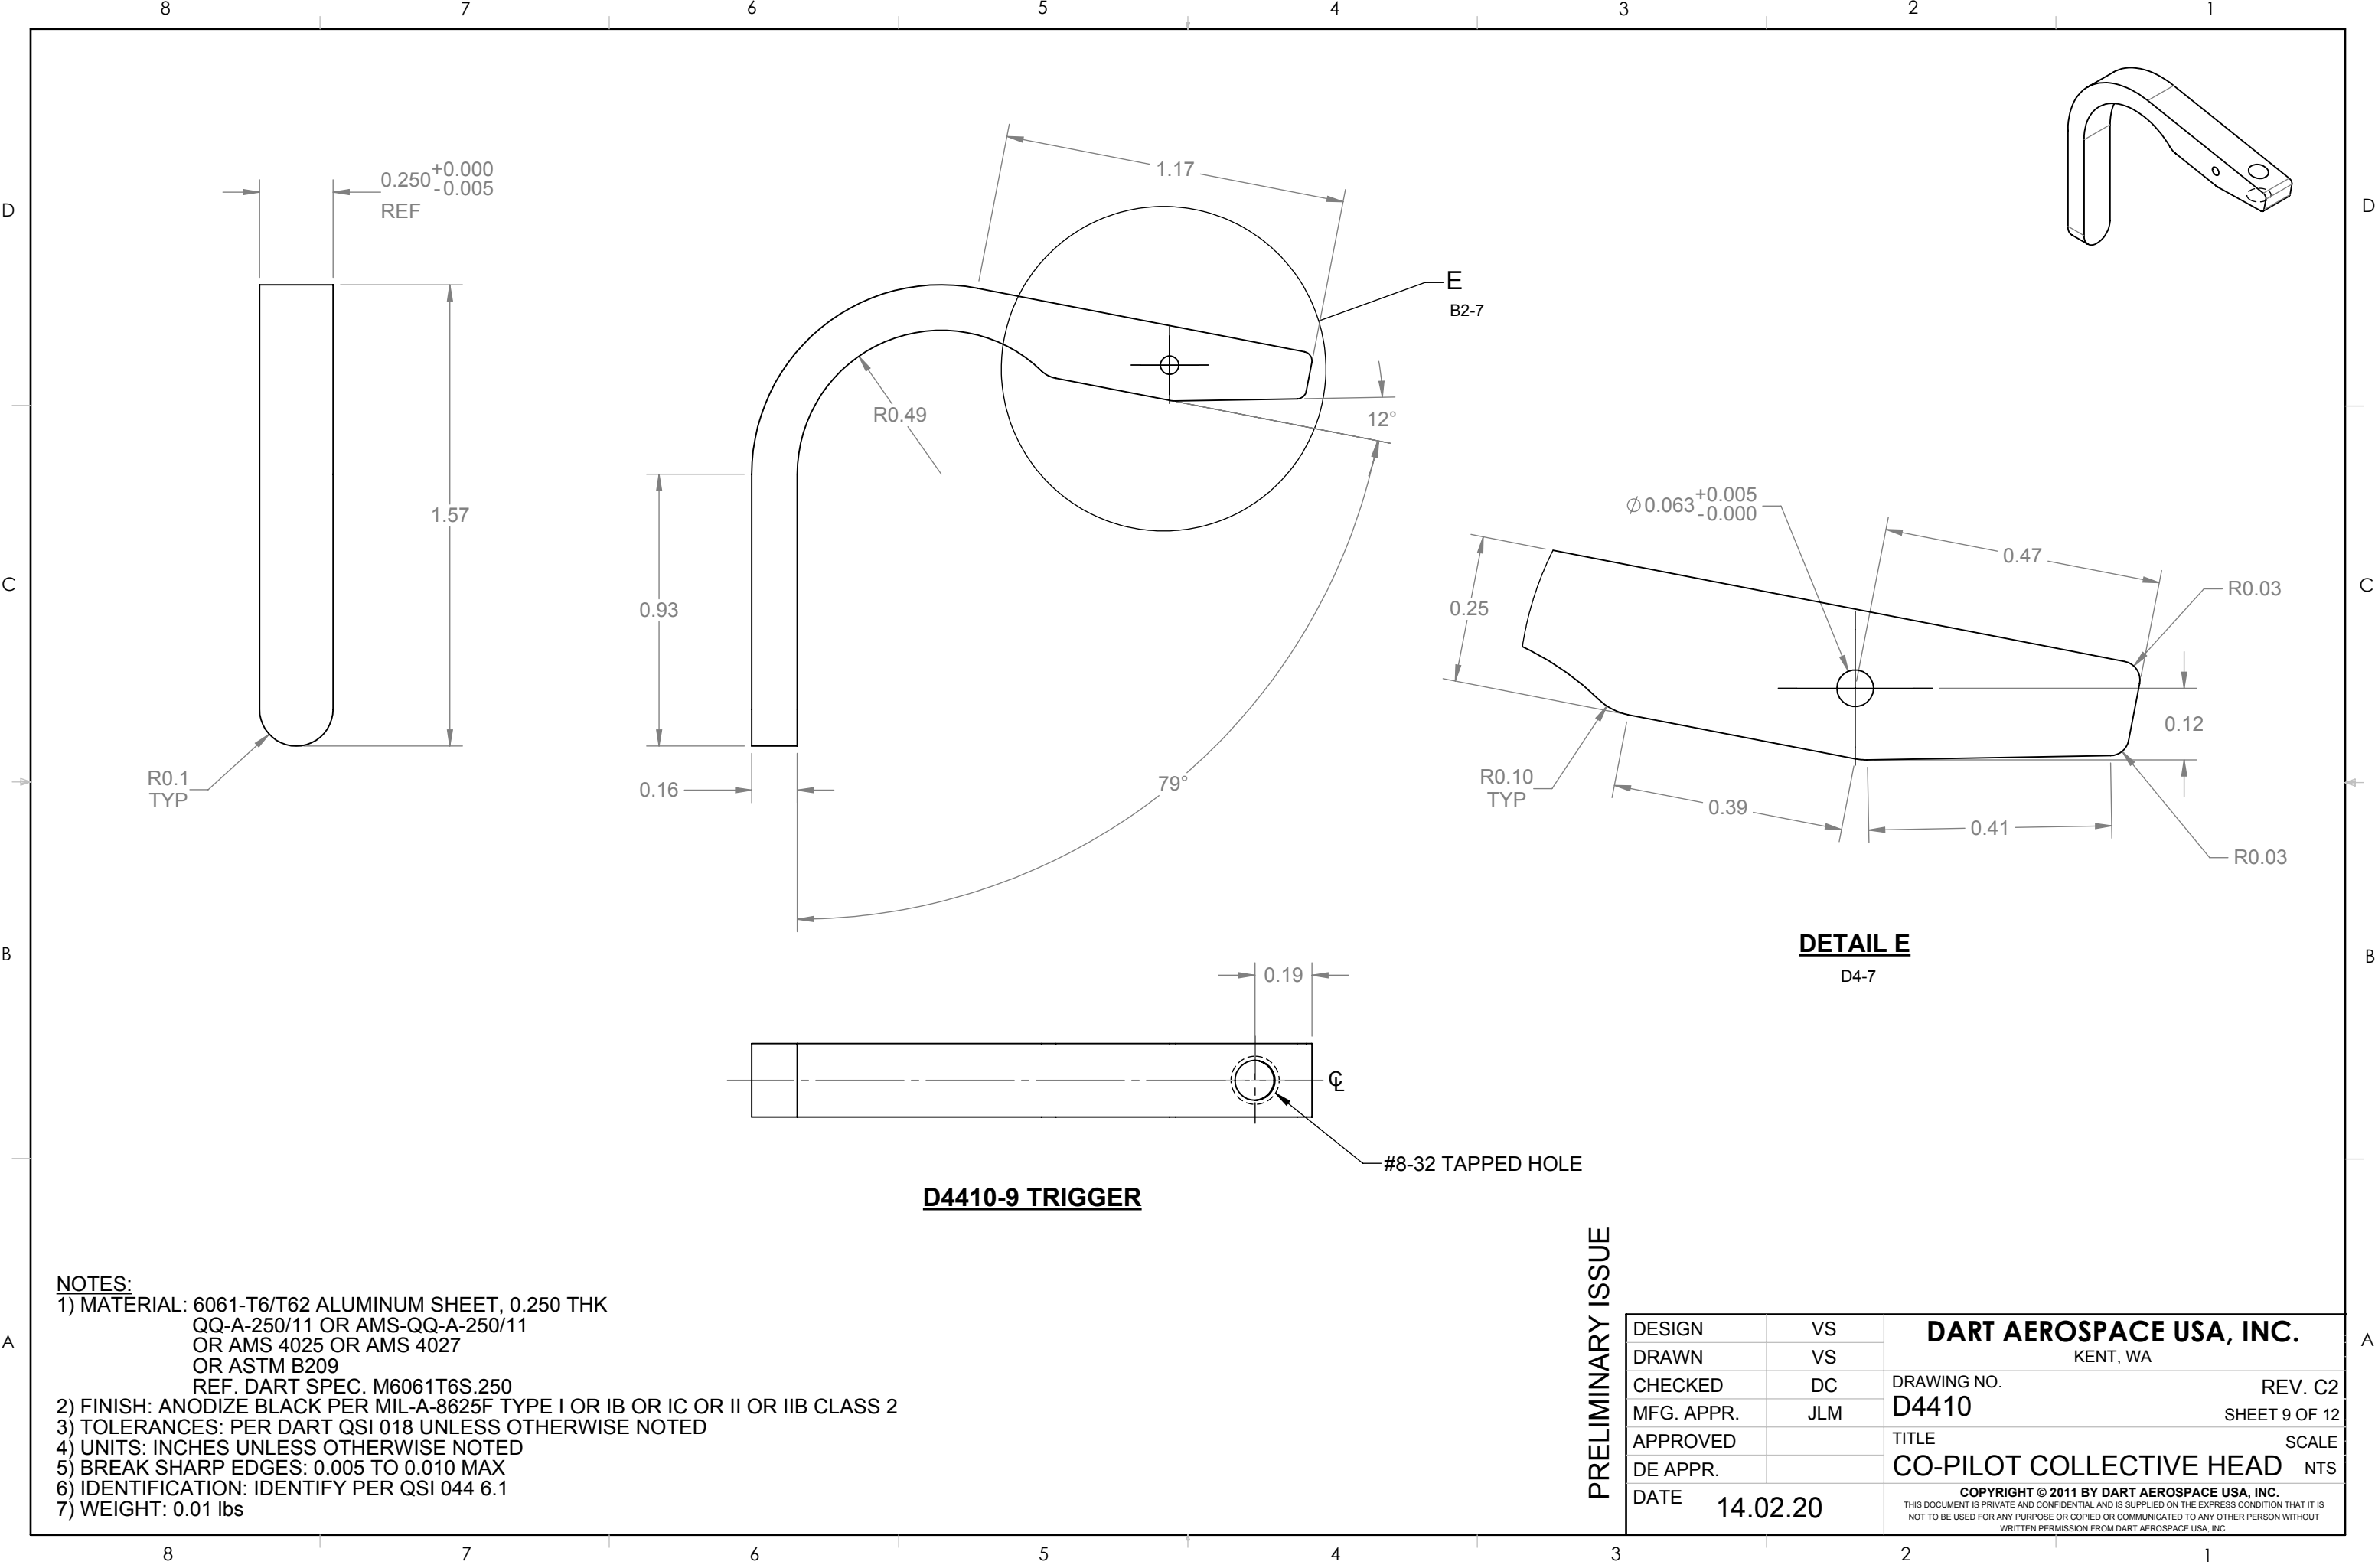


NOTES:

- 1) MATERIAL: 6061-T6/T62 ALUMINUM SHEET, 0.250 THK
QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF. DART SPEC. M6061T6S.250
- 2) FINISH: ANODIZE BLACK PER MIL-A-8625F TYPE I OR IB OR IC OR II OR IIB CLASS 2
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
- 7) WEIGHT: 0.01 lbs

PRELIMINARY ISSUE

DESIGN	VS	DART AEROSPACE USA, INC. KENT, WA	
DRAWN	VS		
CHECKED	DC	DRAWING NO.	REV. C2
MFG. APPR.	JLM	D4410	SHEET 9 OF 12
APPROVED		TITLE	SCALE
DE APPR.		CO-PILOT COLLECTIVE HEAD	NTS
DATE	14.02.20	<small>COPYRIGHT © 2011 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

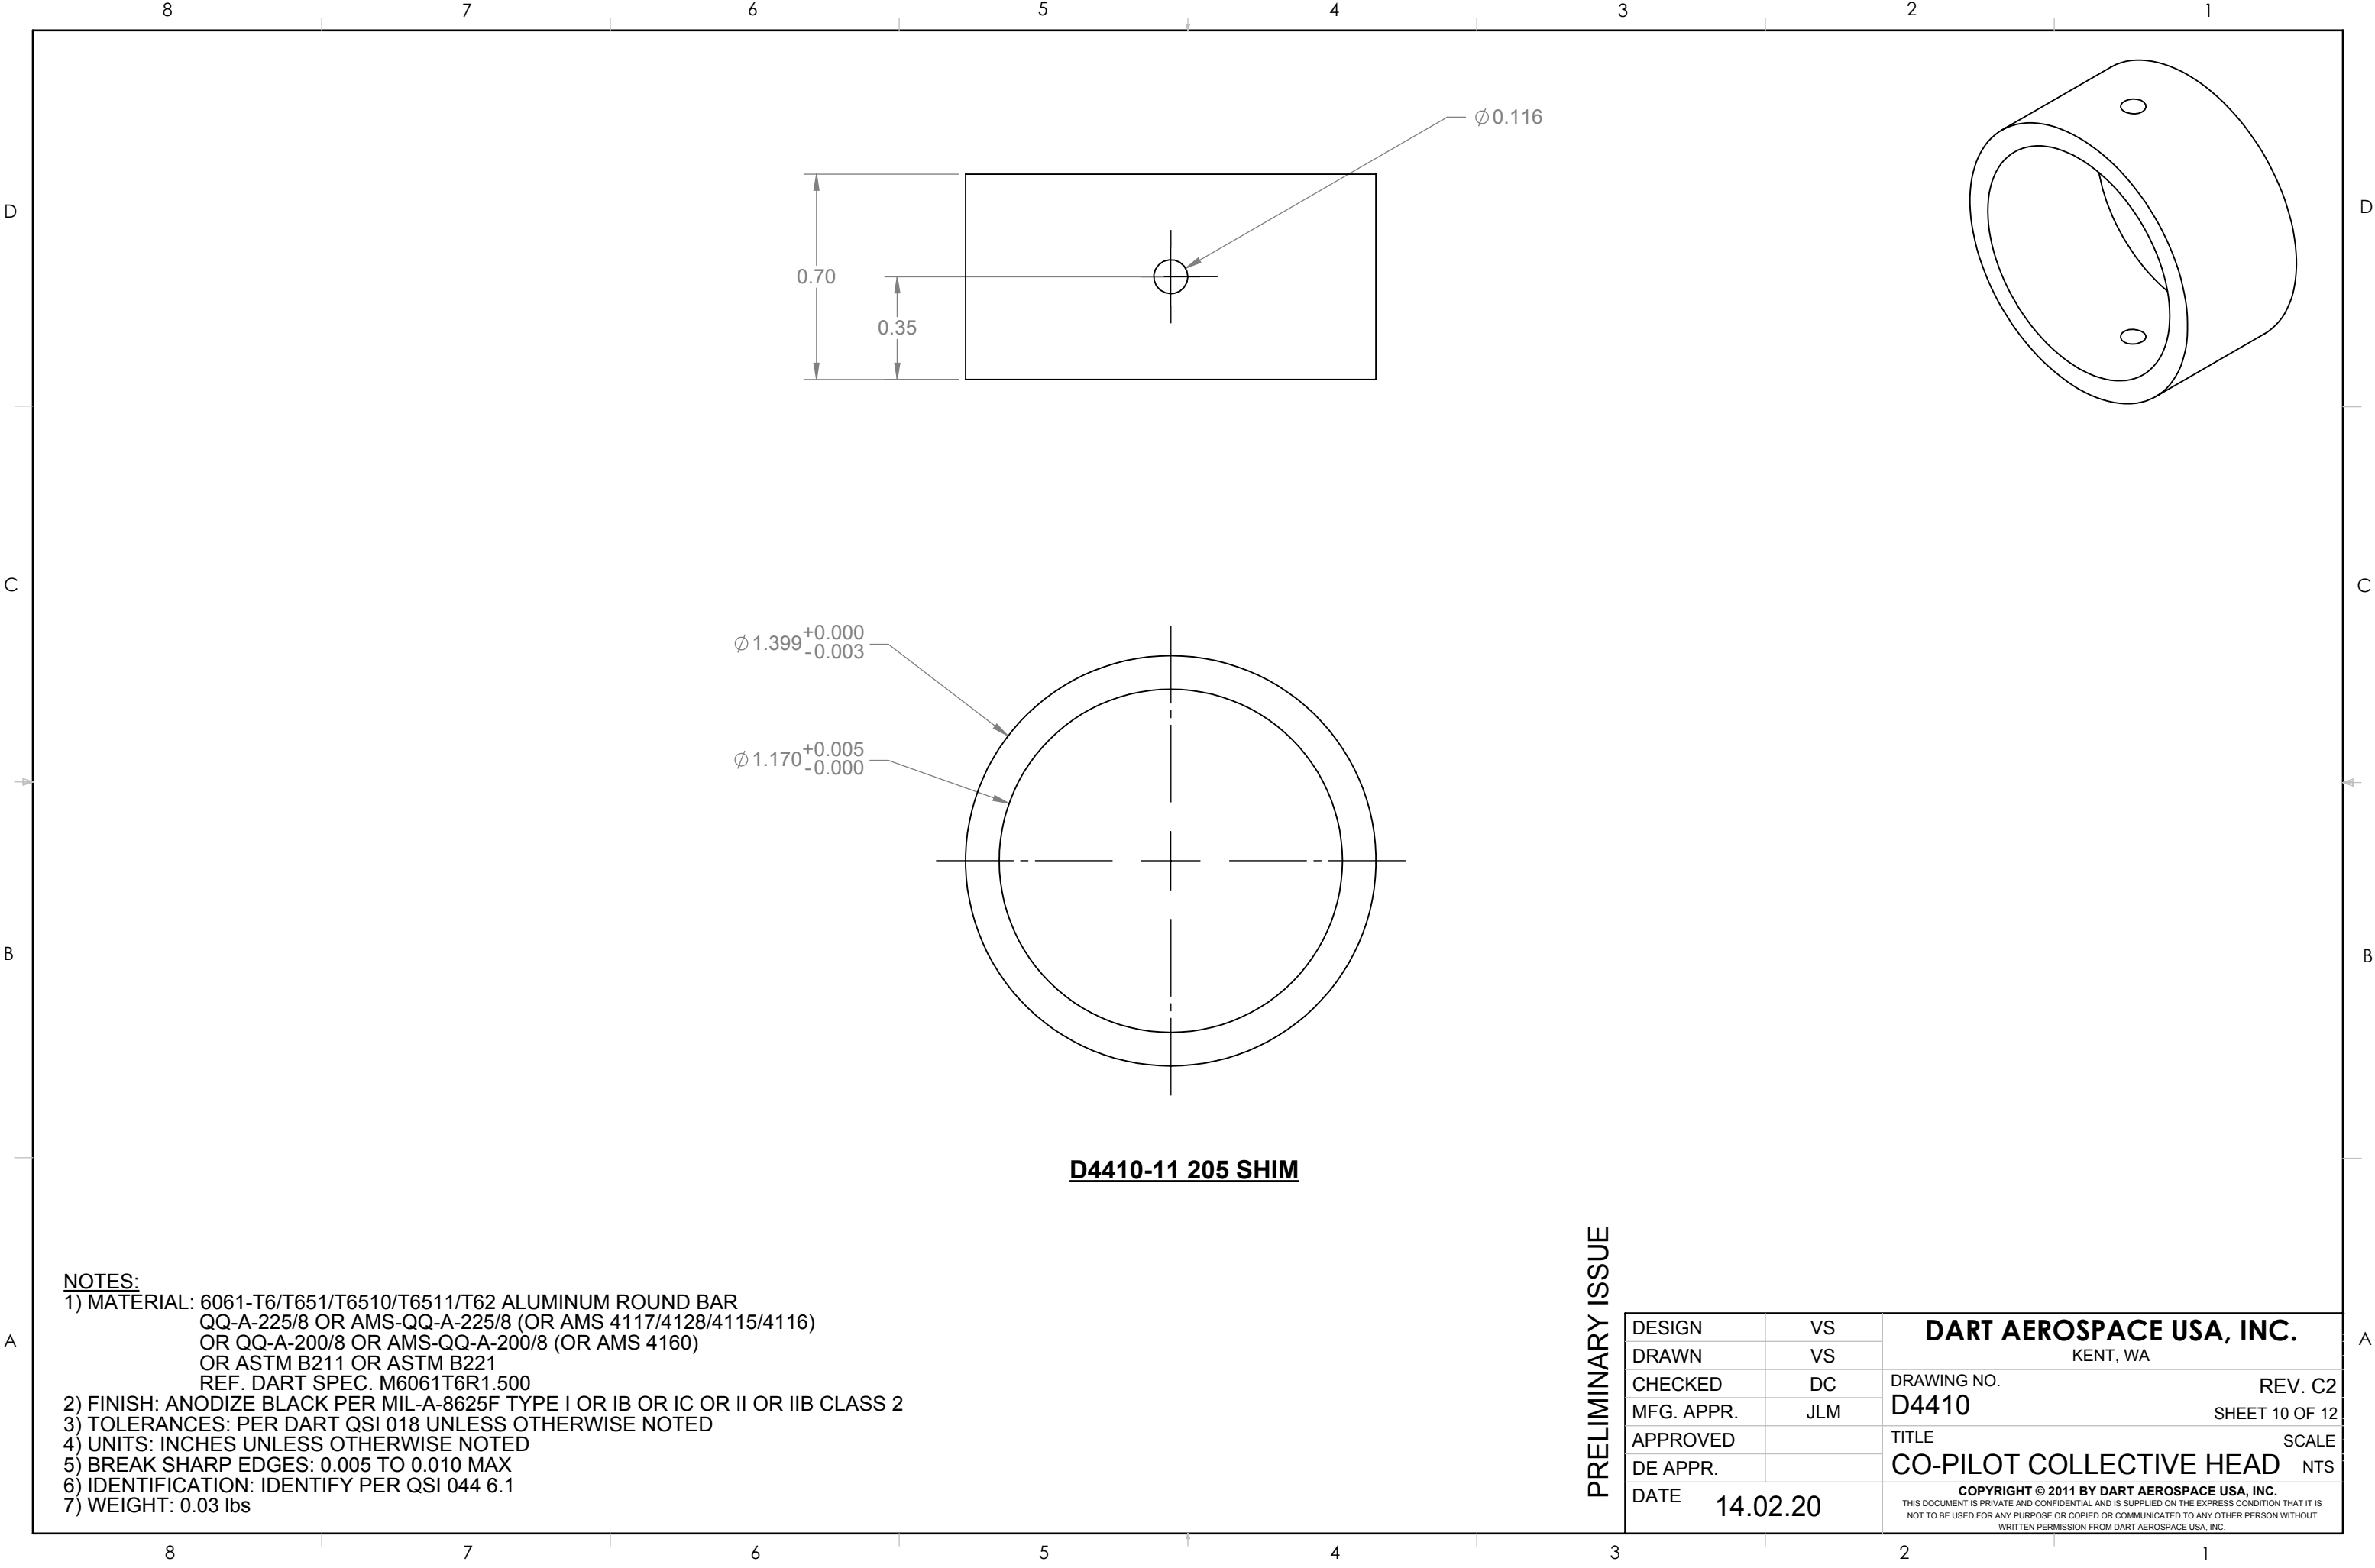

NOTES:
1) MATERIAL: 6061-T6/T651/T6510/T6511/T62 ALUMINUM ROUND BAR
QQ-A-225/8 OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
OR QQ-A-200/8 OR AMS-QQ-A-200/8 (OR AMS 4160)
OR ASTM B211 OR ASTM B221
REF. DART SPEC. M6061T6R1.500
2) FINISH: ANODIZE BLACK PER MIL-A-8625F TYPE I OR IB OR IC OR II OR IIB CLASS 2
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
7) WEIGHT: 0.03 lbs

PRELIMINARY ISSUE

DESIGN	VS	DART AEROSPACE USA, INC. KENT, WA	
DRAWN	VS		
CHECKED	DC	DRAWING NO.	REV. C2
MFG. APPR.	JLM	D4410	SHEET 10 OF 12
APPROVED		TITLE	SCALE
DE APPR.		CO-PILOT COLLECTIVE HEAD	NTS
DATE	14.02.20	<small>COPYRIGHT © 2011 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

